


COMMERCIAL REVERSE JAMB BRACKET MOUNT LOW HEADROOM TO THE REAR TRACK DETAIL

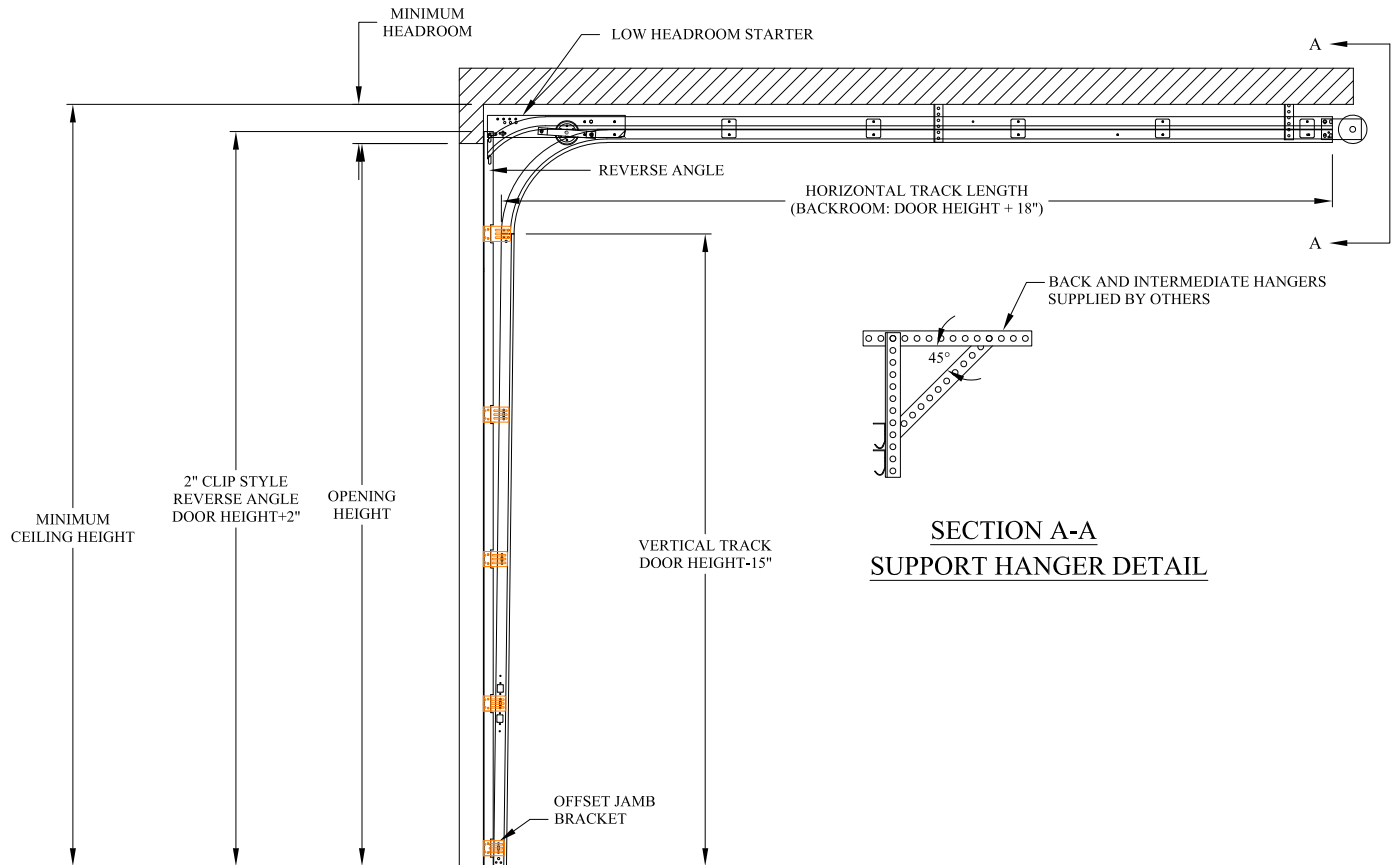

LOW HEADROOM TO THE REAR REVERSE JAMB BRACKET MOUNT TRACK SET DETAIL

TORSION SPRING HEAD ROOM REQUIREMENTS FOR LOW HEADROOM TORION TO THE REAR DOORS				
DOOR HEIGHT	END BEARING PLATE	DRUM	HEADROOM	FLOOR TO SHAFT CENTER
UP TO 8' TALL	6-5/8 FLAT	D400-96	6-1/2"	DH + 2-1/4"
8'-3" - 12' TALL	6-5/8 FLAT	D400-144	6-1/2"	DH + 2-1/4"
12'3" - 16' TALL	6-5/8 FLAT	D525-216	6-1/2"	DH + 2-1/4"
16'3" - 18' TALL	6-5/8 FLAT	D525-216	6-1/2"	DH + 2-1/4"
	6-5/8 FLAT	D800-384	7-5/16"	DH + 2-1/4"

NOTES:
AN ADDITIONAL 4" OF HEADROOM IS REQUIRED
FOR A SINGLE TROLLEY OPERATOR IF INSTALLED.

DH = DOOR HEIGHT