


# COMMERCIAL REVERSE JAMB BRACKET MOUNT

## STANDARD LIFT FOLLOW THE ROOF PITCH

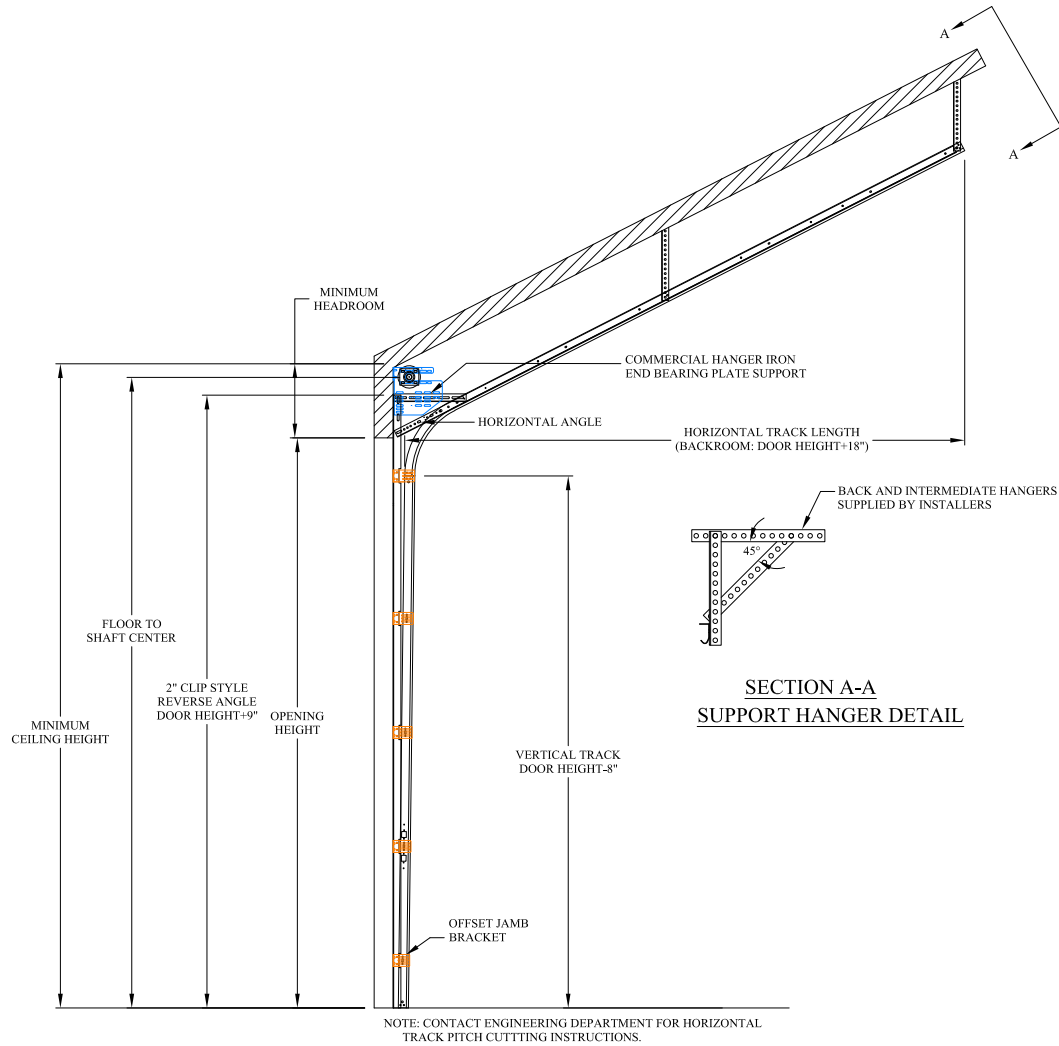

**STANDARD LIFT REVERSE JAMB BRACKET MOUNT TRACK SET DETAIL**  
**FOLLOW THE ROOF PITCH**

| TORSION SPRING HEAD ROOM REQUIREMENTS FOR STANDARD LIFT DOORS |                   |          |                            |                       |                     |                       |                 |                       |
|---------------------------------------------------------------|-------------------|----------|----------------------------|-----------------------|---------------------|-----------------------|-----------------|-----------------------|
| TRACK RADIUS                                                  | DOOR HEIGHT       | DRUM     | 2", 2-5/8", 3-3/4" SPRINGS |                       | 6" & DUPLEX SPRINGS |                       | TRIPLEX SPRINGS |                       |
|                                                               |                   |          | HEADROOM                   | FLOOR TO SHAFT CENTER | HEADROOM            | FLOOR TO SHAFT CENTER | HEADROOM        | FLOOR TO SHAFT CENTER |
| 15"                                                           | UP TO 8' TALL     | D400-96  | 15"                        | DH + 12"              | N/A                 | N/A                   | N/A             | N/A                   |
|                                                               | 8'-3" - 12' TALL  | D400-144 | 15"                        | DH + 12"              | 16-3/4"             | DH + 13-11/16"        | 21-3/16"        | DH + 15-1/16"         |
|                                                               | 12'-3" - 16' TALL | D525-216 | 15-1/2"                    | DH + 12"              | 17-1/4"             | DH + 13-11/16"        | 21-3/16"        | DH + 15-1/16"         |
|                                                               | 16'-3" - 18' TALL | D525-216 | 15-1/2"                    | DH + 12"              | 17-1/4"             | DH + 13-11/16"        | 21-3/16"        | DH + 15-1/16"         |
|                                                               | 18'-3" - 20' TALL | D800-384 | 18-3/4"                    | DH + 13-11/16"        | 18-3/4"             | DH + 13-11/16"        | 21-3/16"        | DH + 15-1/16"         |
| 12"                                                           | UP TO 8' TALL     | D400-96  | 12"                        | DH + 9-7/8"           | N/A                 | N/A                   | N/A             | N/A                   |
|                                                               | 8'-3" - 12' TALL  | D400-144 | 12-3/4"                    | DH + 9-7/8"           | 13-1/4"             | DH + 10-13/16"        | 18-1/8"         | DH + 12-3/16"         |
|                                                               | 12'-3" - 14' TALL | D525-216 | 13-1/4"                    | DH + 9-7/8"           | 14-1/4"             | DH + 10-13/16"        | 18-1/8"         | DH + 12-3/16"         |

NOTES:  
AN ADDITIONAL 4" OF HEADROOM IS REQUIRED  
FOR A SINGLE TROLLEY OPERATOR IF INSTALLED.

AN ADDITIONAL 6" OF HEADROOM IS REQUIRED  
FOR A DUAL TROLLEY OPERATOR IF INSTALLED.

DH = DOOR HEIGHT