


COMMERCIAL ANGLE MOUNT STANDARD LIFT

FOLLOW THE ROOF PITCH

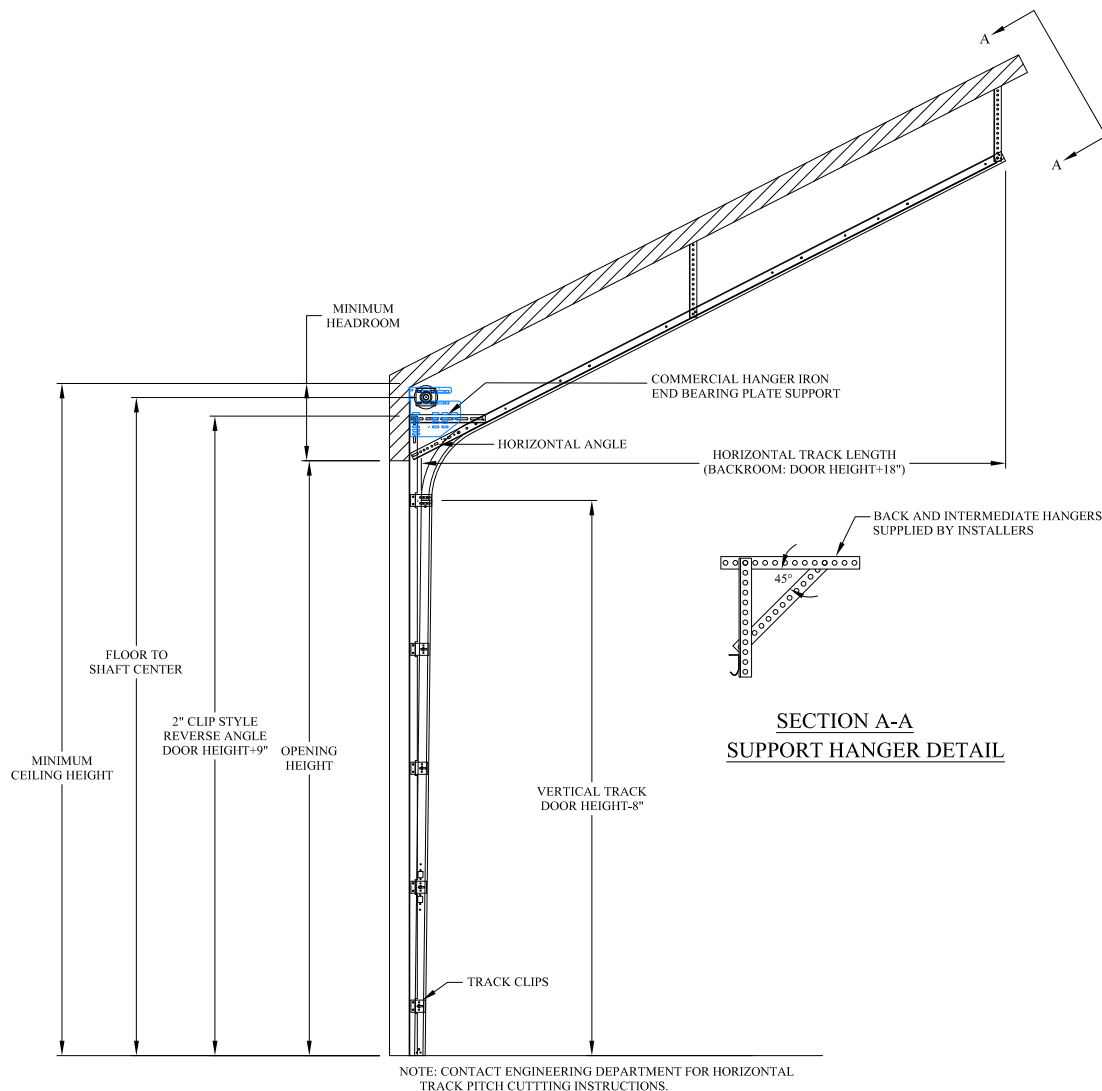

STANDARD LIFT ANGLE MOUNT TRACK SET DETAIL
FOLLOW THE ROOF PITCH

TORSION SPRING HEAD ROOM REQUIREMENTS FOR STANDARD LIFT DOORS								
TRACK RADIUS	DOOR HEIGHT	DRUM	2", 2-5/8", 3-3/4" SPRINGS		6" & DUPLEX SPRINGS		TRIPLEX SPRINGS	
			HEADROOM	FLOOR TO SHAFT CENTER	HEADROOM	FLOOR TO SHAFT CENTER	HEADROOM	FLOOR TO SHAFT CENTER
15"	UP TO 8' TALL	D400-96	15"	DH + 12"	N/A	N/A	N/A	N/A
	8'-3" - 12' TALL	D400-144	15"	DH + 12"	16-3/4"	DH + 13-11/16"	21-3/16"	DH + 15-1/16"
	12'-3" - 16' TALL	D525-216	15-1/2"	DH + 12"	17-1/4"	DH + 13-11/16"	21-3/16"	DH + 15-1/16"
	16'-3" - 18' TALL	D525-216	15-1/2"	DH + 12"	17-1/4"	DH + 13-11/16"	21-3/16"	DH + 15-1/16"
	18'-3" - 20' TALL	D800-384	18-3/4"	DH + 13-11/16"	18-3/4"	DH + 13-11/16"	21-3/16"	DH + 15-1/16"
12"	UP TO 8' TALL	D400-96	12"	DH + 9-7/8"	N/A	N/A	N/A	N/A
	8'-3" - 12' TALL	D400-144	12-3/4"	DH + 9-7/8"	13-1/4"	DH + 10-13/16"	18-1/8"	DH + 12-3/16"
	12'-3" - 14' TALL	D525-216	13-1/4"	DH + 9-7/8"	14-1/4"	DH + 10-13/16"	18-1/8"	DH + 12-3/16"

NOTES:
 AN ADDITIONAL 4" OF HEADROOM IS REQUIRED
 FOR A SINGLE TROLLEY OPERATOR IF INSTALLED.

DH = DOOR HEIGHT

AN ADDITIONAL 6" OF HEADROOM IS REQUIRED
 FOR A DUAL TROLLEY OPERATOR IF INSTALLED.